


SERIES 2001 IHC 400

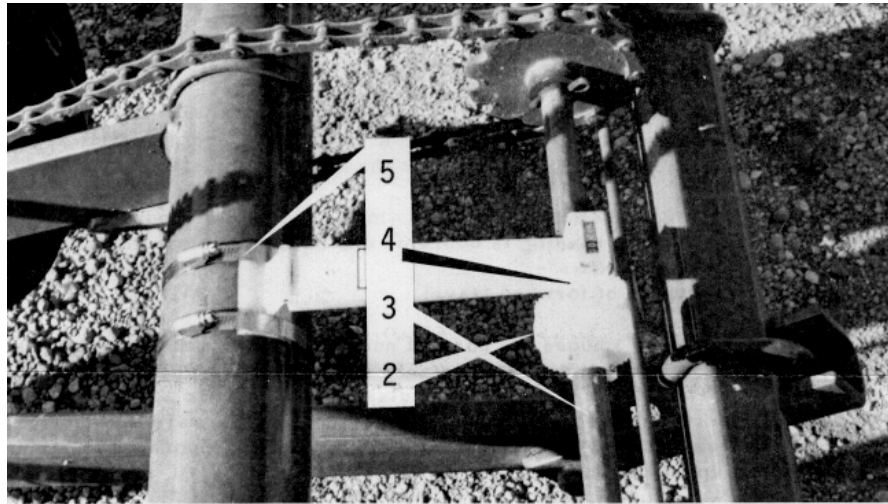

1. Mount cluster gear (2), (48 tooth strap gear on 6 & 8 row models) on 7/8" shaft (3) on right side of hitch when facing planter. Be certain that the two parts are properly matched.
2. Press counter gear (4) onto counter and secure with acorn nut. Be certain to batch the correct gear with planter row spacing as shown on chart below. Mount counter on the bracket (5) as shown.
3. Clamp bracket around main pipe frame of planter using hose clamps. Align counter gear (4) with cluster gear (2).
4. With planter in down position, move bracket (5) until counter gear (4) is directly above strap gear (2). Tighten hose clamps.
5. Calibrate the counter using instructions on back of this sheet.

No of Rows	Row Spacing	Counter Gear	Cluster Gear
4.....	30.....	28.....	medium
4.....	32.....	27.....	large
4.....	36.....	22.....	small
4.....	38.....	22.....	medium
4.....	40.....	22.....	large

No of Rows	Row Spacing	Counter Gear
6.....	30.....	18
6.....	32.....	23
6.....	36.....	20
6.....	38.....	19
6.....	40.....	18
8.....	30.....	18
8.....	34.....	16
8.....	36.....	15
8.....	38.....	14
8.....	40.....	14

