


SERIES 2302 JOHN DEERE 1300



1. Mount strap gear (2) on 7/8" shaft (3) being certain that the two parts are properly matched.
2. Press counter gear (4) onto counter and secure with acorn nut. Be certain to match the correct gear with planter row spacing as shown on chart below. Mount counter on the bracket (5) as shown.
3. Clamp bracket around main pipe frame of planter using hose clamps and align counter gear with (4) with strap gear (2).
4. With planter in the down position, move bracket (5) until gear (4) is directly above strap gear (2). Tighten hose clamps.
5. Calibrate the counter using instructions on back of this sheet.

<u>No of Rows</u>	<u>Row Spacing</u>	<u>Counter Gear</u>
4.....	36.....	31
4.....	38.....	30
4.....	40.....	28
6.....	30.....	25
6.....	28.....	26
8.....	20.....	28

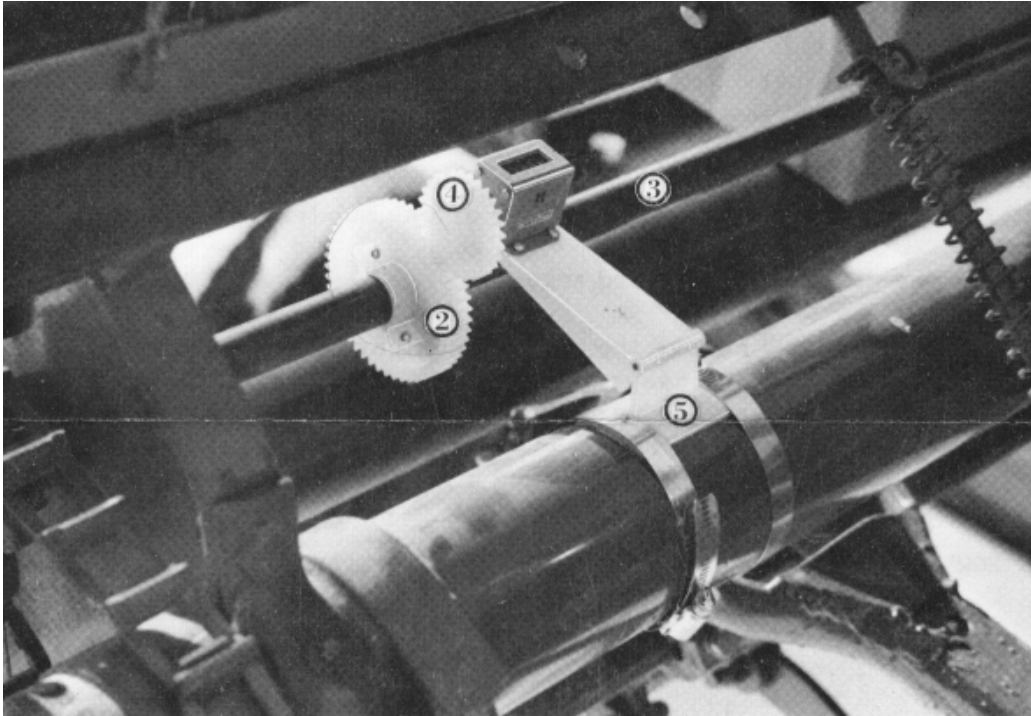